



KONICA MINOLTA

bizhub 226

✓ Black & white A3 multifunctional

✓ Up to 22 pages per minute

Functionality



Printing

- Black & white
- PCL/GDI
- Local/Network



Scanning

- Colour
- Black & white
- Scan-to-eMail
- Scan-to-SMB
- Scan-to-FTP
- Scan-to-USB
- TWAIN Network



Copying

- Black & white



Faxing


- Super G3 Fax
- i-Fax
- PC-Fax



Technology

| | | |
|---------------------------------|--|---|
| Emperon™ – print controller | Easily compatible with different users and IT environments through Konica Minolta's unified print technology | X |
| Simitri® HD – polymerised toner | Delivers high print quality and yet ensures reduced print spending as well as lower environmental impact | ✓ |
| OpenAPI – solution platform | Server-based applications provide efficient workflows for the entire MFP fleet | X |
| i-Option – special feature | Offers extended scope and advanced MFP functionality in line with individual requirements | X |
| CSRC – remote service | Keeps productivity up with online monitoring of devices and consumables through the Konica Minolta service | ✓ |
| IWS – panel customisation | Improved user-device interaction and enhanced productivity through full MFP panel customisation | X |

Option diagram

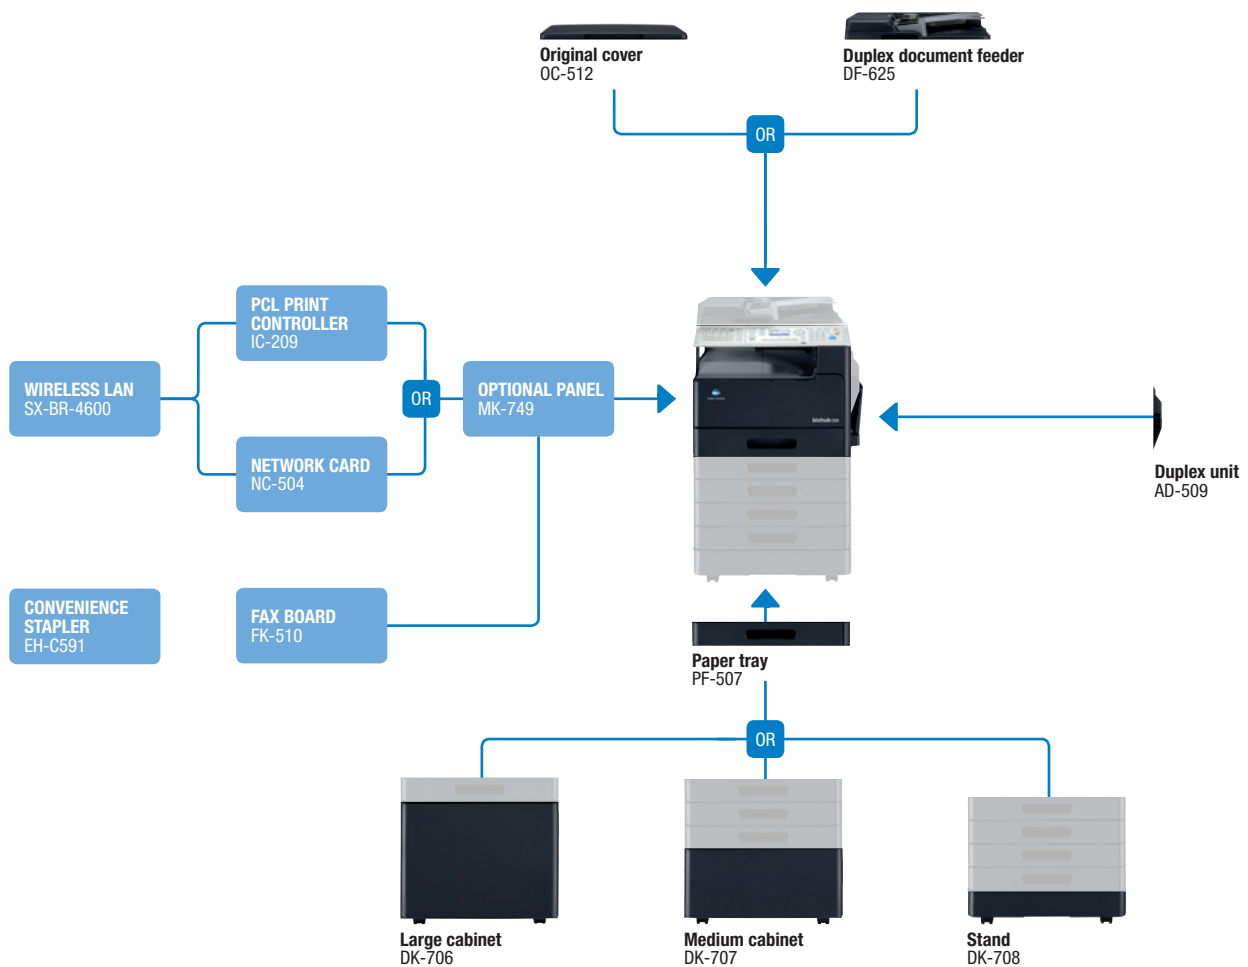

Finishing functionality



Duplex

Descriptions

| | |
|-------------------------------|--|
| bizhub 226 | Fully multifunctional A3 b/w device with 22 ppm; standard copy, print (GDI) and colour scanning functionality (incl. Scan-to-USB); paper capacity of 350 sheets (incl. multi-bypass tray); 128 MB standard memory; USB 2.0 interface |
| DF-625 Document feeder | Automatic document feeding of up to 70 sheets |
| OC-512 Original cover | Cover (instead of ADF) |
| PF-507 Paper tray | B5–A3; 250 sheets; 64–90 gsm; up to four can be equipped |
| DK-706 Desk (large) | For 0 or 1 x PF-507 |
| DK-707 Desk (medium) | For 2 x or 3 x PF-507 |

| | |
|--------------------------------------|---|
| DK-708 Desk (small) | For 4 x PF-507 |
| AD-509 Duplex unit | For duplex prints and copies |
| FK-510 Fax kit | Super G3 fax |
| IC-209 Controller | PCL print controller for PCL printing incl. network functionality |
| NC-504 Network interface card | Network functionality (print and scan) if IC-209 is not installed |
| MK-749 Optional panel | Needed for scan and fax function |
| SX-BR-4600 Wireless LAN | Wireless LAN to network connector |
| EH-C591 Convenience stapler | Convenient stapling of up to 50 sheets per set |

Technical specifications

SYSTEM SPECIFICATIONS

| | |
|---|--|
| System memory | 128 MB |
| Interface | 10Base-T/100Base-TX Ethernet (optional); USB 2.0; Wi-Fi 802.11b/g (optional) |
| Network protocols | TTCP/IP (IPv4; IPv6); HTTP; SNMP |
| Automatic document feeder (optional) | Reverse type; up to 70 originals; A5–A3 35–128 gsm simplex; 50–128 gsm duplex |
| Printable paper size | A5–A3 |
| Customised paper sizes | 90–297 x 140–432 mm |
| Printable paper weight | 64–157 gsm |
| Paper input capacity | Standard: 350 sheets Max.: 1,350 sheets |
| Paper tray 1 | 250 sheets; A5–A3; Customised paper sizes (90–297 x 140–432 mm); 64–157 gsm |
| Multi-bypass tray | 100 sheets; A5–A3; Customised paper sizes (90–297 x 140–432 mm); 64–157 gsm |
| Paper tray 2–5 (optional) | 250 sheets; B5–A3; Customised paper sizes (182–297 x 140–432 mm); 64–90 gsm |
| Automatic duplexing (optional) | A5–A3; 64–90 gsm |
| Finishing modes | Group; sort; crisscross |
| Output capacity | Max.: 250 sheets |
| Copy/print volume (monthly) | Rec.: 5,000 pages Max.: 15,000 pages |
| Toner lifetime | Up to 12,000 pages |
| Power consumption | 220–240 V / 50/60 Hz; less than 1.3 kWh |
| System dimensions (W x D x H) | 607 x 570 x 458 mm (without options) |
| System weight | 28.2 kg (without options/consumables) |

COPIER SPECIFICATIONS

| | |
|---------------------------------------|---|
| Copying process | Laser electrostatic image transfer |
| Toner system | Simitri® HD polymerised toner |
| Copy/print speed A4 | Up to 22 ppm Up to 24 ppm (from optional paper tray) |
| Copy/print speed A3 | Up to 8.0 ppm |
| Autoduplex speed A4 (optional) | Up to 15.8 ppm |
| 1st copy out time | Less than 6.5 sec. |
| Warm-up time | Approx. 15 sec. ² |
| Copy resolution | 600 x 600 dpi |
| Gradation | 256 gradations |
| Multi-copy | 1–999 |
| Original format | A5–A3 |
| Magnification | 25–400% in 0.1% steps; auto-zooming |
| Copy functions | 2in1; 4in1; book copy; ID copy; shift margin; erase; image rotation; program registration |

PRINTER SPECIFICATIONS

| | |
|----------------------------------|--|
| Print resolution | GDI: 600 x 600 dpi PCL (optional): 1,200 x 600 dpi |
| Page description language | GDI PCL 6/5e (optional) |
| Operating systems | Windows Vista (32/64) Windows 7 (32/64) Windows 8 (32/64) Windows 10 (32/64) Windows Server 2008 (32/64) Windows Server 2008 R2 Windows Server 2012 Windows Server 2012 R2 Linux; Citrix |
| Printer fonts | 53 PCL Latin |
| Print functions | N-up; watermark; secure print; image rotation; booklet function (optional) |

¹ If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed

² Warm-up time may vary depending on the operating environment and usage



SCANNER SPECIFICATIONS

| | |
|---------------------------------|--|
| Scan speed (mono/colour) | Up to 46 opm (300 dpi via optional ADF) Up to 20 opm (150 dpi via optional ADF) |
| Scan resolution | Max.: 600 x 600 dpi |
| Scan modes | Scan-to-eMail (optional) Scan-to-SMB (optional) Scan-to-FTP (optional) Scan-to-USB Local TWAIN scan Network TWAIN scan (optional) |
| File formats | PDF; JPEG; TIFF |
| Scan destinations | 32 one-touch destinations; 250 speed dial destinations; LDAP support |

FAX SPECIFICATIONS

| | |
|-------------------------|--|
| Fax standard | Super G3 (optional) |
| Fax transmission | Analogue i-Fax |
| Fax resolution | Standard; Fine; Super-fine Max.: 408 x 392 dpi (Super-fine via optional ADF) |
| Fax compression | MH; MR; MMR; JBIG |
| Fax modem | Up to 33.6 Kbps |
| Fax destinations | 32 one-touch destinations; 250 speed dial destinations |
| Fax functions | PC-Fax; polling; forward; phone book; redial |

SYSTEM FEATURES

| | |
|-------------------|--|
| Accounting | Up to 50 accounts |
| Software | PageScope Web Connection PageScope NetCare Device Manager |



- All specifications refer to A4-size paper of 80 gsm quality.
- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (6% coverage of A4).
The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
- Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.



by Charles Kieffer Group

Tél. +352 26 380 1 **Fax** +352 26 380 380
sales@ck-group.lu
 2, rue Léon Laval - Z.A. Am Bann
 L-3372 Leudelange
ck-group.lu



Visit our product page