


bizhub 650i

Black & White A3 multifunctional





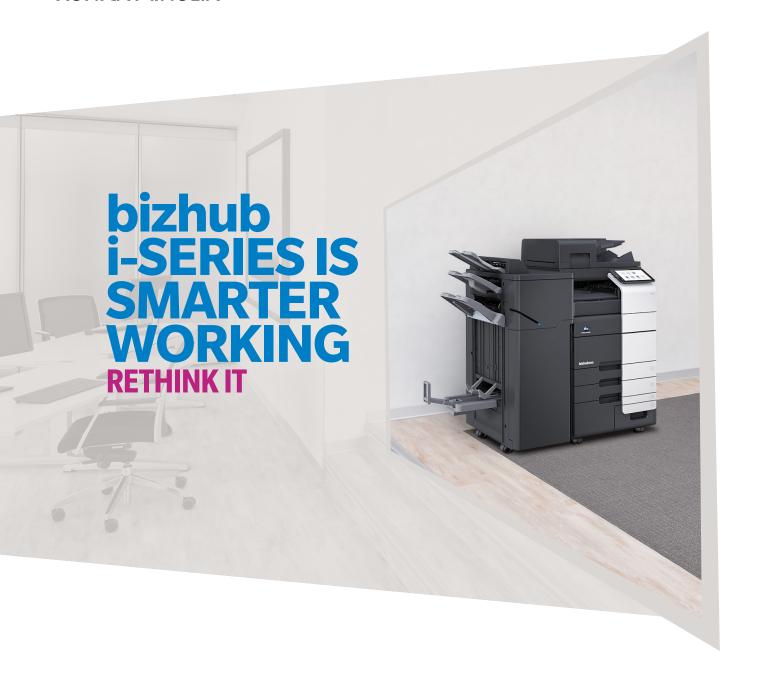



CUSTOMER BENEFITS



Security

Secure network integration, data encryption, hard drive overwrite and advanced user authentication



Productivity

Reliability, high-speed scanning and printing, combined with powerful finishing functions



Sustainability

Numerous eco features reduce energy consumption and costs



Intuitive operability Operate the bizhub like a

smartphone or tablet with fully customized user interface



Application ecosystem Enhanced efficiency thanks

to Konica Minolta's extensive applications portfolio



Services

Efficient printer fleet management, including automatic consumables delivery, pro-active maintenance and remote setup

OPTIONS



PDF enhancements

OCR text recognition

Barcode fonts LK-106

Unicode fonts

OCR A and B fonts


Document converter pack

ThinPrint® client

Antivirus LK-116

FOIP IP Fax (T.38)







Working table

10-Key pad Security kit

Replacement SSD

Keyboard holder KH-102

MEDIA INPUT

Intelligent media senso

1x Universal tray PC-116 2x Universal tray

Large capacity tray PC-417

Large capacity tray

Large capacity tray LU-207

Banner tray

5 MEDIA OUTPUT

Output tray OT-513

Staple finisher FS-540

OR

Post inserter for FS-540/SD PI-507 Job separator for FS-540/SD OR

Z-fold unit for FS-540/SD ZU-609

LEGEND

respective option above it

Mandatory option

This option can only be installed with the

Option

FINISHING FUNCTIONALITIES































stapling

stapling

punching

punching

Duplex

Combined mixplex/ mixmedia

Half-fold

insertion

Tri-fold

Booklet

Offset sorting

printing

Stapling

DESCRIPTION

ENHANCED FEATURES	
LK-102v3 PDF enhancements	PDF/A(1b), PDF encryption, digital signature
LK-105v4 OCR text recognition	Searchable PDF and PPTX
LK-106 Barcode fonts	Supports native barcode printing
LK-107 Unicode fonts	Supports native Unicode printing
LK-108 OCR A and B fonts	Supports native OCR A and B font printing

 LK-110v2 Document converter pack
 Generates various file formats incl. DOCX, XLSX and PDF/A

 LK-111 ThinPrint® client
 Print data compression for reduced network impact

 LK-116 Antivirus
 Bitdefender® antivirus provides real time scanning of all incoming and outgoing data

 LK-117 FOIP activation
 Fax over IP networks (T.38), requires fax kit

CONNECTIVITY

FK-514 Fax board	Super G3 fax, digital fax functionality
UK-221 Wireless LAN	Wireless LAN and wireless LAN Access Point Mode
EK-608 USB I/F kit	USB keyboard connection
EK-609 USB I/F kit	USB keyboard connection; Bluetooth
AU-102 Biometric authentication	Finger vein scanner
ID card reader	Various ID card technologies
MK-735 Mount kit	Installation kit for ID card reader

OTHERS

WT-506 Working table	Authentication device placement
KP-102 10-Key pad	For use instead of touchscreen
SC-509 Security kit	Copy guard function
EM-908 Replacement SSD	1 TB SSD to increase storage space
KH-102 Keyboard holder	To place USB keyboard

MEDIA INPUT

IM-102 Intelligent media sensor	Auto detects paper weight and type
PC-116 1x Universal tray	500 sheets, A5–A3, 52–256 g/m ²
PC-216 2x Universal tray	2x 500 sheets, A5–A3, 52–256 g/m²
PC-416 Large capacity tray	2,500 sheets, A4, 52–256 g/m ²
PC-417 Large capacity tray	1,500 + 1,000 sheets, A5–A4, 52–256 g/m ²
LU-302 Large capacity tray	3,000 sheets, A4, 52–256 g/m²
LU-207 Large capacity tray	2,500 sheets, A4–SRA3, 52–256 g/m ²
MK-730 Banner tray	Multipage banner feeding

MEDIA OUTPUT

WIEDIA OUTPUT	
OT-513 Output tray	Output tray used instead of finisher
FS-539 Staple finisher	50-sheet stapling; 3,200 sheets max. output
FS-539SD Booklet finisher	50-sheet stapling; 20 sheets booklet finisher;
	2,200 sheets max. output
PK-524 Punch kit for FS-539/SD	2/3-hole punching; auto switching
FS-540 Staple finisher	100-sheet stapling; 3,200 sheets max. output
FS-540SD Booklet finisher	100-sheet stapling; 20 sheets booklet finisher;
	2,700 sheets max. output
PK-526 Punch kit for FS-540/SD	2/3-hole punching; auto switching
RU-513 Relay unit	For FS-539/SD or FS-540/SD installation
JS-602 Job separator for FS-540/SD	Separation of fax output; etc.
PI-507 Post inserter for FS-540/SD	Cover insertion; post finishing
ZU-609 Z-fold unit for FS-540/SD	Z-fold for A3 prints

TECHNICAL SPECIFICATIONS

SYSTEM SPECIFICATIONS

System speed 8.5" x11"	Up to 65 ppm
System speed 11" x 17"	Up to 32 ppm
Autoduplex speed 8.5" x11"	Up to 65 ppm
1st page out time 8.5" x11"	2.8 sec.
Warm-up time	Approx. 15 sec. ¹
Imaging technology	Laser
Toner technology	Simitri® HD polymerized toner
Panel size/resolution	10.1" / 1024 x 600
System memory	8,192 MB (standard/max)
System hard drive	256 GB SSD (standard) / 1 TB SSD (optional)
Interface	10/100/1,000-Base-T Ethernet; USB 2.0;
	Wi-Fi 802.11 b/g/n/ac (optional)
Network protocols	TCP/IP (IPv4/IPv6); SMB; LPD; IPP; SNMP; HTTP(S)
Automatic document feeder	Up to 300 originals / 5.5" x 8.5" – 11" x 17" /
	35–210 g/m² / Dual scan ADF
ADF double feed detection	Standard
Printable paper size	3.5" x 5.5" – 12" x 18" / customized paper sizes /
	banner paper max. 47.2" x 11.7"
Printable paper weight	52–300 g/m ²
Paper input capacity	1,150 sheets / 6,650 sheets (standard/max)
Paper tray input (standard)	1 x 500 /3.5" x 5.5" – 11" x 17" / custom sizes / 52–256 g/m²
	$1 \times 500 / 5.5$ " x 8.5 " – 12 " x 18 " / custom sizes / 52 – $256 g/m^2$
Paper tray input (optional)	1 x 500 / 5.5" x 8.5" - 11" x 17" / 52-256 g/m ²
	2 x 500 / 5 5" x 8 5" – 11" x 17"/ 52–256 g/m ²

2 x 500 / 5.5" x 8.5" - 11" x 17"/ 52-256 g/m²
1 x 2,500 / 8.5" x 11" /52-256 g/m²

1 x 1,500 + 1 x 1,000 sheets / 5.5" x 8.5" or 8.5" x 11"

 $/52 - 256 \, g/m^2$

SYSTEM SPECIFICATIONS

Large capacity tray (optional)	1 x 3,000 / 8.5" x 11" / 52-256 g/m ²
	1 x 2,500/ 8.5" x 11" – 12" x 18" / custom sizes /
	52-256 g/m ²
Manual bypass	150 sheets / 3.5" x 5.5" – 12" x 18" / custom sizes /
	banner / 60–300 g/m²
Finishing modes (optional)	Offset; Group; Sort; Staple; Staple (offline); Punch; Half-fold;
	Letter-fold; Booklet; Post insertion; Z-fold
Automatic duplexing	4.1" x 5.5" – 12" x 18" / 52–256 g/m²
Output capacity	Up to 250 sheets / up to 3,300 sheets (standard/max)
Stapling	Max. 100 sheets or 98 sheets + 2 cover sheets (up to 300 g/m^2)
Stapling output capacity	Max. 200 sets
Tri-fold	Max. 3 sheets
Tri-fold capacity	Max. 50 sets; unlimited (without tray)
Booklet	Max. 20 sheets or 19 sheets + 1 cover sheet (up to 300 g/m^2)
Booklet output capacity	Max. 35 booklets; unlimited (without tray)
Duty cycle (monthly)	Rec. 53,000 pages; Max. ² 200,000 pages
Toner lifetime	Black up to 24,000 pages
Imaging unit lifetime	Black up to 240,000/1,000,000 pages (drum/developer)
Power consumption	110–120 V / 60 Hz, Less than 1.6 kW
System dimension (W x D x H)	24.2" x 27.1" x 37.8" (without options)
System weight	Approx. 220 lb (without options)

PRINTER SPECIFICATIONS

Print resolution	1,800 (equivalent) x 600 dpi; 1200 x 1200 dpi
Page description language	PostScript 3 (CPSI 3016); PCL 6 (XL3.0); PCL 5c; XPS
Operating systems	Windows 7 (32/64); Windows 8.1 (32/64); Windows 10 (32/64);
	Windows Server 2008 (32/64); Windows Server 2008 R2;
	Windows Server 2012; Windows Server 2012 R2;
	Windows Server 2016; Windows Server 2019;
	Macintosh OS X 10.10 or later; Linux
Printer fonts	80 PCL Latin; 137 PostScript 3 Emulation Latin
Mobile printing	Konica Minolta Print Service (Android);
	Konica Minolta Mobile Print (iOS/Android);
	AirPrint (iOS; Mopria (Android)
	optional: WiFi Direct

SCANNER SPECIFICATIONS

Scan speed	Up to 140 ipm in simplex (mono)
	Up to 280 ipm in duplex (mono)
Scan resolution	Up to 600 x 600 dpi
Scan modes	Scan-to-eMail (Scan-to-Me); Scan-to-SMB (Scan-to-Home);
	Scan-to-FTP; Scan-to-Box; Scan-to-USB; Scan-to-WebDAV;
	Scan-to-DPWS; Scan-to-URL; TWAIN scan
File formats	JPEG; TIFF; PDF; Compact PDF; Encrypted PDF; XPS; PPTX
	optional: Searchable PDF; PDF/A 1a and 1b;
	Searchable DOCX/PPTX/XLSX
Scan destinations	2.000 destinations + 100 groups; LDAP support

COPIER SPECIFICATIONS

	=
Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1–9,999
Original format	Max. 11" x 17"
Magnification	25–400% in 0.1% steps; Auto-zooming

FAX SPECIFCIATION

TAK SI EGI GIATION		
Fax standard	Super G3 (optional)	
Fax transmission	Analog; i-Fax; Color i-Fax; IP-Fax	
Fax resolution	Up to 600 x 600 dpi	
Fax compression	MH; MR; MMR; JBIG	
Fax modem	Up to 33.6 Kbps	

FAX SPECIFCIATION

Fax destinations	2,000 single + 100 groups
USER BOX SPECIFICATIONS	
Storable documents	Up to 3,000 documents or 10,000 pages
Type of user boxes	Public; Personal (with password or authentication);
	Group (with authentication)
Type of system boxes	Secure print; Encrypted PDF print; Fax receipt; Fax polling
SYSTEM FEATURES	
Security	ISO 15408 HCD-PP Common Criteria (in evalutation);
	IP filtering and port blocking; SSL3 and TLS1.0/1.1/1.2 network
	communication; IPsec support; IEEE 802.1x support;
	User authentication; Authentication log; Secure print; Kerberos;
	Hard drive overwrite; Hard drive data encryption (AES 256);
	Confidential fax; Print user data encryption
	optional: Antivirus realtime scanning (Bitdefender®);
	Copy protection (Copy Guard, Password Copy)
Accounting	Up to 1,000 user accounts; Active Directory support (user name +
	password + e-mail + smb folder); User function access definition;
	Authentication by mobile device (Android)
	optional: Biometric authentication (finger vein scanner);
	ID card authentication (ID card reader);
	Authentication by mobile device (iOS)
Software	Net Care Device Manager; Data Administrator; Box Operator;
	Web Connection; Print Status Notifier; Driver Packaging Utility;
	Log Management Utility

- All specifications refer to 8.5" x 11" paper of 80 g/m 2 weight.
- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
 The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a
 particular page size (5% coverage of 8.5" x 11"). The actual life of each consumable will vary depending on use and
 other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient
 temperature and humidity.
- Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

























Tél. +352 26 380 1 | **Fax** +352 26 380 380 sales@ck-group.lu

2, rue Léon Laval L-3372 Leudelange

ck-officetechnologies.lu

© 2020 KONICA MINOLTA BUSINESS SOLUTIONS U.S.A., INC. All rights reserved. Reproduction in whole or in part without written permission is prohibited. KONICA MINOLTA, the KONICA MINOLTA logo and bizhub are registered trademarks or trademarks of KONICA MINOLTA, INC. All other product and brand names are trademarks or registered trademarks of their respective companies or organizations. All features and functions described here may not be available on some products. Design & speci ications are subject to change without notice.



¹ Warm-up time may vary depending on the operating environment and usage

 $^{^{2}}$ If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed